TurboVap®

Second Generation Solvent Evaporators





We've Listened - Here it Is

TurboVap® is a second generation product which builds on the solid foundations of the historic TurboVap product line and incorporates many new customer-driven features. It still features the highly efficient patented gas vortex shearing technology, which is synonymous with the TurboVap brand.



The patented gas vortex shearing technology is what makes TurboVap® evaporators so effective.

New Customer-driven Features

The new TurboVap® is designed around a common chassis with interchangeable accessories, allowing users to switch quickly between configurations for a wide range of sample sizes and applications. The TurboVap® EH setup allows seamless use of Extrahera sample/collection racks in the new system.

Notable enhancements include a well-lit glass tank for much greater visibility, removable/replaceable nozzles on the lid, on-the-fly nozzle adjustment, easily exchangeable manifolds to extend functionality, programmable evaporation flow gradients, easy access drain port and user friendly touch screen interface. The system can be vented from the bench or placed in a fume hood. Because the footprint is noticeably smaller on the modern unit, less space is required.

Flexible Rack System

A novel and innovative feature of the new TurboVap family is the Multi Rack that can be fully adjusted for a range of tube and vial sizes. By using the series of Multi Racks, TurboVap LV will accommodate tube and vial sizes from 1.5 mL up to 60 mL. Two versions of the 48 position rack are available to accomodate most common glassware sizes. When used in the 24 position mode, the 24 position Multi Rack will accommodate 24 x I-Chem/ASE/EPA vials or 24 x 50 mL centrifuge tubes/ Greiner. TurboVap II accomodates both 50 mL and 200 mL end point sensor tubes using two separate racks.

The flexible Multi Racks allow evaporation of saples in virtually any tube size. See page 6-7.





Biotage Evaporation System Selection Guide





TurboVap[®]

One Platform, Three Systems

TurboVap® LV

Evaporation of up to 48 samples with independent control of flow in each row. Can be used in either 24 or 48 position mode. Compatible with tube sizes ranging from 10 to 30 mm (outer diameter) and from 32 up to 165 mm in length.

Read More

TurboVap® LV Product Note (PPS440) →



TurboVap® II

Evaporates six 50 or 200 mL samples with independent vial control. Automatic sensors detect when the solvent reaches the end-point volume and automatically stop the evaporation.

Read More

■ TurboVap® II Product Note (PPS442)



TurboVap® EH

Jump seamlessly from Biotage® Extrahera™ to TurboVap® EH without moving tubes from one rack to another. TurboVap® EH takes 48 samples up to 18 x 75 mm.





Configurations

Multi Racks

Gas Manifolds

TurboVap® LV









48-position rack for 10–16 mm mini vials, PN **415489**. 48-position rack for 10–20 mm vials, PN **414964**. 24-position rack for 21–30 mm vials, PN **415129**.

48-nozzle manifold, PN **415408**. Block nozzles with caps for use with the 24-position rack.

TurboVap® II







6-nozzle manifold, PN **415222**.

6-position rack with end-point sensors for 200 mL tubes, PN **415100**. 6-position rack with end-point sensors for 50 mL tubes, PN **415535**. 6-position rack for 50 or 200 mL tubes, PN **415494**.



TurboVap® EH

Rack holder for two sample/collection tube racks, PN **415510**.



24-position sample/collection racks for 12 mm tubes, PN **415491**. 24-position sample/collection racks for 16 mm tubes, PN **415585**. 24-position sample/collection racks for 18 mm tubes, PN **415492**.



2x24-position manifold, PN 415490.


Tube and Rack Compatibility

Test Tube	Biotage Tube P/N	Matching TurboVap [®] II Rack	Matching TurboVap [®] LV Rack	Matching TurboVap° EH Rack
Evaporation Tube TurboVap II, 50 mL 0.5 mL End Point	C128508	415535		
Evaporation Tube TurboVap II, 50 mL 1 mL End Point	C128511	415535		
Evaporation Tube TurboVap II, 50 mL Centrifuge	C128512	415535		
Evaporation Tube TurboVap II, 200 mL 0.5 mL End Point	C128507	415100		
Evaporation Tube TurboVap II, 200 mL 1 mL End Point	C128506	415100		
Test Tubes 10 x 75 mm	C48985		414964	
Test Tubes 12 x 75 mm	C44651		414964 415129	415510 in combo with 415491
Test Tubes 13 x 100 mm	C40707		414964 415129	
Test Tubes 16 x 75 mm	413282		414964 415129	415510 in combo with 415585
Test Tubes 16 x 100 mm	C40708		414964 415129	
Test Tubes 16 x 125 mm	C45273		414964 415129	
Test Tubes 18 x 75 mm	414574		414964 415129	415510 in combo with 415492
Test Tubes 18 x 150 mm	N/A		414964 415129	
Test Tubes 20 x 150 mm	C40709		414964 415129	
Test Tubes 25 x 150 mm	N/A		415129	
Test Tubes 15 mL Conical	C44941		414964 415129	
Test Tubes 10 mL Conical	C47811		414964 415129	
Test Tubes 15 mL, Conical	C47816		414964 415129	
IChem/ASE/EPA Vials 40 mL (28 x 98 mm)	415148		415129	
50 mL centrifuge tubes or Greiner	N/A		415129	
GC/LC autosampler vials 12 x 32 mm	N/A		415489	
Screw and crimp cap vials 4 mL 15 x 45 mm	N/A		415489	
Flip cap microcentrifuge tubes 1.5 mL 42 x 11 mm	N/A		415489	
Flip cap microcentrifuge tubes 2.0 mL 42 x 11 mm	N/A		415489	
Screw cap microcentrifuge tubes 1.5 mL 46 x 11 mm	N/A		415489	
Screw cap microcentrifuge tubes 2.0 mL 46 x 11 mm	N/A		415489	

Tubes




1.5 mL Screw Cap 46 x 11 mm




1.5 mL Flip Cap 42 x 11 mm



2 mL Screw Cap 46 x 11 mm




2 mL Flip Cap 42 x 11 mm




200 mL 1 mL endpoint C128506



200 mL 0.5 mL endpoint C128507




50 mL 1 mL endpoint C128511



50 mL 0.5 mL endpoint C128508



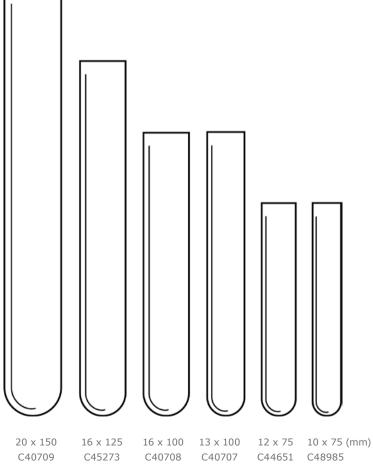

TurboVap® – Second Generation Solvent Evaporators | © Biotage 2017

Technical Specifications

Evaporation

Gas Supply

The system should operate using inert gas. Compressed air can be used but is not recommended with some solvents due to the possible risk of explosion.

Gas

Connection

The gas inlet tube supplied with the system has a 6 mm outer diameter. The system is also shipped with two connectors for conversion to 1/4" or 3/8" outer diameter.

Gas Regulator Not included. Available separately as an optional accessory (P/N 352281SP Pressure Regulator, and P/N 353480SP Supply Connection Set).

Pressure Required for Full Capability

6 bar (0.6 MPa, 87 PSI)

Maximum Pressure

9 bar (0.9 MPa, 130 PSI)

Water Temperature Range

Ambient to 90 °C

Heating Duration

40 min. (from 20 °C to 55 °C)

Max Gas Flow

- » 48 positions: 3.5 litres/min » 24 positions: 5.5 litres/min » 6 positions: 7 litres/min

Solvent Compatibility

- » Acetone
- » Acetonitrile
- » Chloroform
- » Dichloromethane
- » Diethyl ether
- » Dimethylformamide » Dimethylsulfoxide
- » Ethanol
- » Ethyl acetate
- » Heptane
- » Hexane
- » Isooctane
- » Isopropanol
- » Methanol
- » Methyl tert-butyl ether
- » Pentane
- » Tetrahydrofuran
- » Toluene
- » Water

Chemical Resistance

- » Acetic acid 10%
- » Ammonium hydroxide 10%
- » Formic acid 5%
- » Phosphoric acid 5%
- » Propionic acid 10%
- » Trichloroacetic acid 5%
- » Triethylamine 10%
- » Trifluoroacetic acid 5%

Compatible Racks and Tube Sizes

TurboVap LV

- 3 48 positions for
- $10-16 \text{ mm (OD)} \times <45 \text{ mm (length) mini vials}$
- » 48 positions for
- 10-20 mm (OD) x 75-165 mm (length) tubes
- » 24 positions for
 - 12-30 mm (OD) x 75-165 mm (length) tubes

TurboVap II

6 positions for 50 and 200 mL evaporation tubes

- with 0.5 and 1 mL end-point
- TurboVap EH
- » 24 Positions, 12 x 75 mm tubes
- » 24 Positions, 16 x 75 mm tubes
- » 24 Positions, 18 x 75 mm tubes

Interfaces

Touch Screen

7 inch touch screen

Auxiliary

Connection for end-point detection

System

Fume Hood/ Ventilation

The system must be either connected to a ventilation system using the exhaust outlet at the rear of the system or placed in a well-ventilated fume hood or an equivalent enclosure to reduce the risk of exposure to harmful solvent vapours. The ventilation system or fume hood must be capable of exhausting 1 m³/min (35.3 ft³/min).

Connection

The exhaust hose supplied with the system is 3.8 meters (12.5 feet) and has a 50.8 mm (2") inner

diameter.

Operating **Temperature**

18 °C to 32 °C

-25 °C to 60 °C

Temperature

Humidity

20% to 90% RH (non-condensing)

Electrical Supply

100-127 V and 220-240 V at 50/60 Hz

Fuses

F10 A at the power inlet (1 required)

Max Power Consumption

1000 VA

Weight

17 kg (37.5 lbs) when the water bath is empty and

maximum 29 kg (63.9 lbs) with deionized water, rack, and tubes.

Dimensions (WXDXH) 400 x 400 x 390 mm (15.7" x 15.7" x 15.4") including the hinges at the side and exhaust at the rear. The height with the lid open is 590 mm

(23.2").

May Sound Level

75 dB(A)

Certifications

CE marked and CB and NRTL certified

Ordering Information

Part Number	Description	Part Number	Description		
Base Systems		Tubes and Caps			
415000	TurboVap LV	C48985	10 x 75 mm Test Tube 1000-pack		
	(includes 415408 manifold, but no rack)	C44651	12 x 75 mm Test Tube 1000-pack		
415001	TurboVap II	C40707	13 x 100 mm Test Tube 1000-pack		
415540 TurboVap El	(includes 415222 manifold, but no rack)	413282	16 x 75 mm Test Tube 1000-pack		
	(includes 415490 manifold, but no rack)	C40708	16 x 100 mm Test Tube 1000-pack		
	(metades 113 130 manifold) but no rucky	C45273	16 x 125 mm Test Tube 1000-pack		
TurboVap® LV Configuration		414574	18 x 75 mm Test Tube 304-pack		
415408	TurboVap LV Manifold (48 Nozzles)	C40709	20 x 150 mm Test Tube 500-pack		
415489	TurboVap LV Multi Rack	C47811	10 mL Conical Centrifuge Test Tube 125-pack		
	(48 Positions, 10-16 mm Mini Vials)	C44941	15 mL Conical Centrifuge Test Tube 125-pack		
	TurboVap LV Multi Rack (48 Positions, 10-20 mm Tubes)	C47816	15 mL Volumetric Test Tube for AutoTrace 12-pack		
415129	TurboVap LV Multi Rack	C44942	Snap Caps for 15 mL Conical Centrifuge Test Tubes (Polypropylene) 500-pack		
(24 Positions, 21-30 mm Tubes) TurboVap® II Configuration		C128506	Evaporation Tube TurboVap II 200 mL, 1 mL End-Point 12-pack		
415222	TurboVap II Manifold (6 Nozzles)	C128507	Evaporation Tube TurboVap II		
415100	TurboVap II Rack with End-Point Sensors		200 mL, 0.5 mL End-Point 12-pack		
	(6 Positions, 200 mL Tubes)	C128508	Evaporation Tube TurboVap II 50 mL, 0.5 mL End-Point 12-pack		
415535	TurboVap II Rack with End-Point Sensors (6 Positions, 50 mL Tubes)	C128511	Evaporation Tube TurboVap II 50 mL, 1 mL End-Point 12-pack		
415494	TurboVap II Multi Rack without End-Point Sensors (6 Positions, 50/200 mL Tubes)	C128512	Evaporation Tube TurboVap II 50 mL, Centrifuge 12-pack		
TurboVap° EH Configuration					
415490	TurboVap EH Manifold (2 x 24 Nozzles)	Spare Parts			
415510	TurboVap EH Sample/Collection Rack Holder	414892SP	Replacement Nozzle for TurboVap 8-pack		
	(2 Positions)	C46811	Nozzle Plug for TurboVap 25-pack		
(24	Sample/Collection Rack	415231SP	Multi Rack Vial Spring 10-pack		
	(24 Positions, 12 x 75 mm Tubes)	415232SP	Multi Rack Height Adjustment Handles (Pair)		
415585	Sample/Collection Rack (24 Positions, 16 x 75 mm Tubes)	415229SP 415656SP	Replacement End-Point Sensor for TurboVap II Aqua Stabil, 100 mL		
415492	Sample/Collection Rack (24 Positions, 18 x 75 mm Tubes)	C43067	Venting Hose 50.8 mm (2") ID, 3.8 meters (12.5 feet) long		
		414742SP	Fuse, 10AF/250VAC Fast, 6.3 x 32 mm		
		415814SP	Air/N ₂ Inlet Tubing, 6 mm OD		
		352281SP	Pressure Regulator		
		353480SP	Supply Connection Set		



Your Complete Partner for Effective Chemistry

Biotage is a worldwide supplier of instruments and accessories designed to facilitate the work of laboratory and process chemists. With our deep knowledge of the industry, academic contacts and in-house R&D teams, we can deliver the best solutions to your challenges. We take great pride in our flexibility and ability to meet our customer's individual needs. With strong foundations in both analytical, organic and process chemistry, we can offer the widest range of solutions available on the market.

EUROPE

Main Office: +46 18 565900 Toll Free: +800 18 565710 Fax: +46 18 591922 Order Tel: +46 18 565710 Order Fax: +46 18 565705 order@biotage.com Support Tel: +46 18 56 59 11 Support Fax: + 46 18 56 57 11

NORTH & LATIN AMERICA

Main Office: +1 704 654 4900 Toll Free: +1 800 446 4752 Fax: +1 704 654 4917 Order Tel: +1 704 654 4900 Order Fax: +1 434 296 8217 ordermailbox@biotage.com Support Tel: +1 800 446 4752 Outside US: +1 704 654 4900 eu-1-pointsupport@biotage.com us-1-pointsupport@biotage.com

JAPAN

Tel: +81 3 5627 3123 Fax: +81 3 5627 3121 jp_order@biotage.com jp-1-pointsupport@biotage.com cn-1-pointsupport@biotage.com

CHINA

Tel: +86 21 2898 6655 Fax: +86 21 2898 6153 cn_order@biotage.com

Tel: + 82 31 706 8500 Fax:+ 82 31 706 8510 korea_info@biotage.com

Distributors in other regions are listed on www.biotage.com





